

MOROOKA EUROPE




MST-1500VD

**RUBBER CRAWLER
CARRIER**

Max Payload 7T.

**CARRIER for SOFT, SANDY and
ROUGH TERRAIN**

MST-1500VD

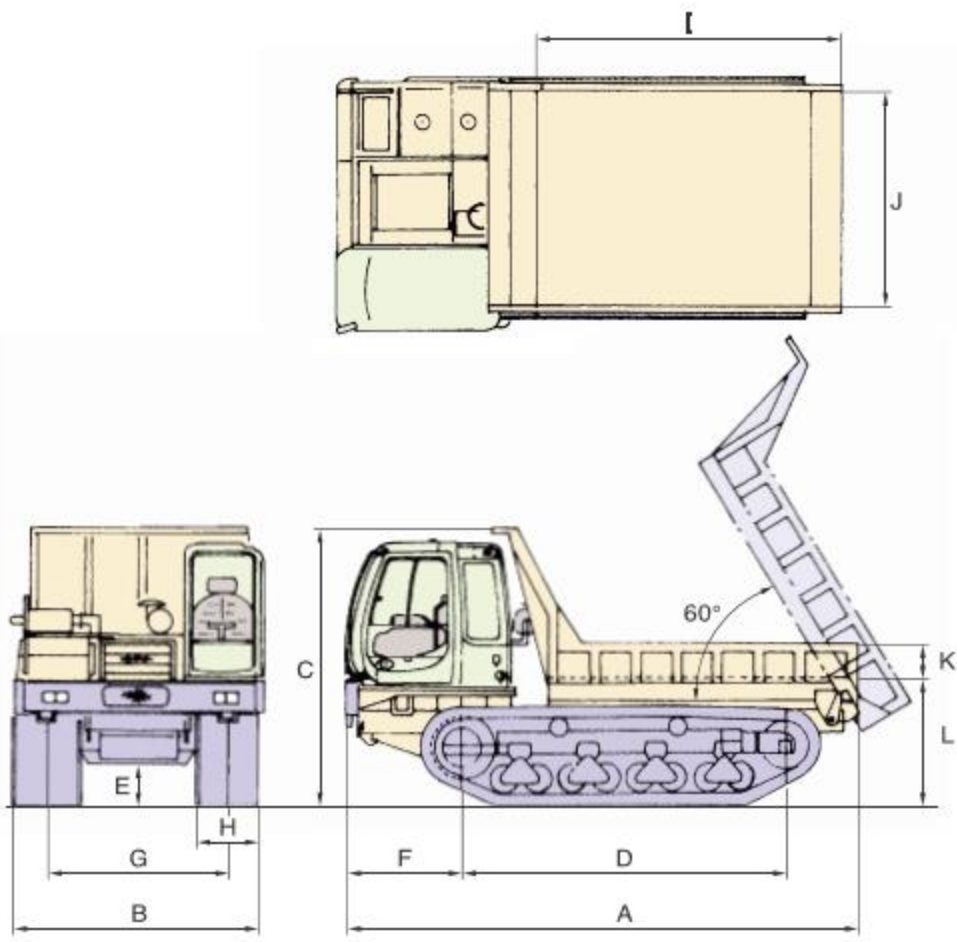

Two driving lever



Control panel with LCD screen



Easy Control with HST drive system

Long and wide rubber crawler to provide low ground pressure as well as stability and excellent traction

| Model | | MST-1500VD | | DUMP BODY | | | TANK CAPACITY | | | | | | |
|--------------------------|--------------------|------------|-----------------------|------------------------|----|--------------------------------------------------------------|----------------------------------------------|-----------|-----|--------------------------------------------|--|--|--|
| PERFORMANCE | | | | ENGINE | | | DRIVE SYSTEM | | | | | | |
| Maximum Payload | Kg | 7,000 | Overall Length | I | mm | 3,100 | Fuel Tank | ℓ | 200 | | | | |
| Loading Capacity | m ³ | 2.39 | Overall Width | J | mm | 2,200 | Hydraulic Tank | ℓ | 100 | | | | |
| Speed1 Low | Km/h | 6.0 | Overall Height | K | mm | 350 | Liquid cooling Tank | ℓ | 36 | | | | |
| Speed2 High | Km/h | 11.0 | Ground Clearance | L | mm | 1,350 | GRADEABILITY | | | | | | |
| Ground Pressure(empty) | Kg/cm ² | 0.20 | Model | | | Cummins QSB6.7 Tier 4 final Stage 4 | Fully loaded: 36% (20 degree) Continuous | | | | | | |
| Ground Pressure(full) | Kg/cm ² | 0.33 | Nominal Output/rpm | | | HP(kw)/rpm | 225(168)/2,200 | | | | | | |
| MACHINE DIMENSION | | | | Torque | | | N.m/min-1 | 949/1,500 | | | | | |
| Machine Weight | Kg | 10,900 | HYDRAULIC PUMP | | | OTHER Cabin (ROPS) Air conditioner Radio | | | | | | | |
| Overall Length | A | mm | 5,750 | Main Pump | | | | | | 2x variable displacement axial piston pump | | | |
| Overall Width | B | mm | 2,650 | Maximum oil flow | | | | | | ℓ/min. 165 | | | |
| Overall Height | C | mm | 2,910 | Pilot pump | | | | | | 1x gear pump | | | |
| Wheelbase | D | mm | 3,870 | Maximum oil flow | | | | | | ℓ/min. 79.4 | | | |
| Min. Ground Clearance | E | mm | 540 | HYDRAULIC MOTOR | | | | | | | | | |
| Front Overhang | F | mm | 965 | Travel Motor | | | 2x variable displacement axial piston motors | | | | | | |
| Crawler Distance | G | mm | 1,800 | | | | | | | | | | |
| Crawler Width | H | mm | 700 | | | | | | | | | | |
| Crawler Size | | mm | 700 x 100 x 98 | | | | | | | | | | |

MOROOKA EUROPE

Im Neugrund 14
64521 Gross-Gerau
Germany

Web: www.morookaeurope.com



Contact

MEERMANMACHINES |||| MEERMAN GROEP

Meerman Machines bv
Koggehaven 20
3133 LA Vlaardingen
Tel: +31(0)10-4350611
Email: info@meerman.nl
Web: www.meerman.nl