

MOROOKA EUROPE




MST-2200VD

**RUBBER CRAWLER
CARRIER**

Max Payload 11T.

**CARRIER for SOFT, SANDY and
ROUGH TERRAIN**

MST-2200VD

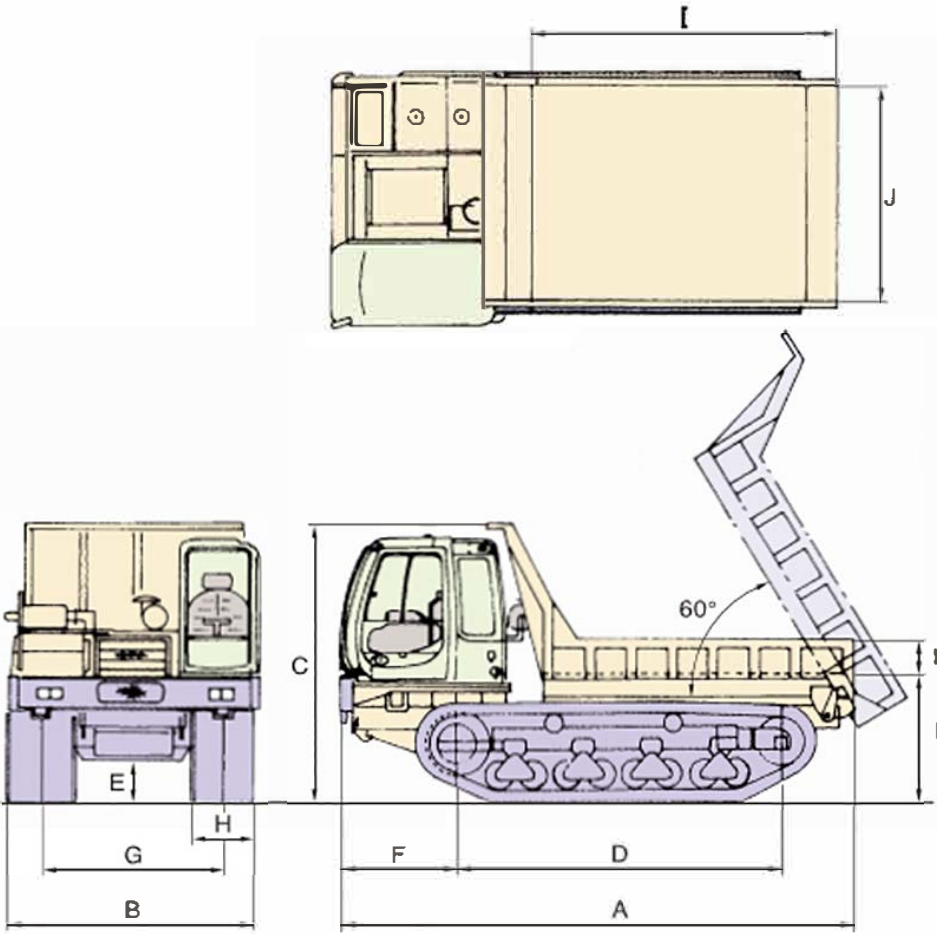

Two driving lever



Control panel with LCD screen



Easy Control with HST drive system



Long and wide rubber crawler to provide low ground pressure as well as stability and excellent traction

Model		MST-2200VD		low ground pressure as well as stability and excellent traction						
PERFORMANCE				DUMP BODY				TANK CAPACITY		
Maximum Payload	Kg	11,000		Overall Length	I	mm	3,600	Fuel Tank	ℓ	240
Loading Capacity	m³	3.53		Overall Width	J	mm	2,450	Hydraulic Tank	ℓ	155
Speed1 Low	Km/h	7.0		Overall Height	K	mm	400	Liquid cooling Tank	ℓ	36
Speed2 High	Km/h	10.0		Ground Clearance	L	mm	1,430	DRIVE SYSTEM		
Ground Pressure(empty)	Kg/cm²	0.25		ENGINE				HST		
Ground Pressure(full)	Kg/cm²	0.45		Model	Cummins QSB6.7 Tier 4 final Stage 4			GRADEABILITY		
MACHINE DIMENSION								Fully loaded: 36% (20 degree) Continious		
Machine Weight		Kg	14,100	Nominal Output/rpm	HP(kw)/rpm	249(186)/2,200		OTHER		
Overall Length	A	mm	6,260	Torque	N.m/min-1	990/1,500				
Overall Width	B	mm	2,850	HYDRAULIC PUMP				Cabin (ROPS) Air conditioner Radio		
Overall Height	C	mm	3,170	Main Pump	2x variable displacement axial piston pump					
Wheelbase	D	mm	3,750	Maximum oil flow	ℓ/min.	165				
Min. Ground Clearance	E	mm	480	Pilot pump	1x gear pump					
Front Overhang	F	mm	1,330	Maximum oil flow	ℓ/min.	112				
Crawler Distance	G	mm	2,050	HYDRAULIC MOTOR						
Crawler Width	H	mm	750	Travel Motor	2x variable displacement axial piston motors					
Crawler Size		mm	750 x 150 x 66							

MOROOKA EUROPE

Im Neugrund 14
64521 Gross-Gerau
Germany

Web: www.morookaeurope.com



Contact